


High Speed 2-Port USB Hub Controller USB 2.0 3.3V Tray 36-Pin SQFN EP

Manufacturers	Microchip Technology, Inc
Package/Case	SQFN-36
Product Type	Interface ICs
RoHS	Rohs
Lifecycle	

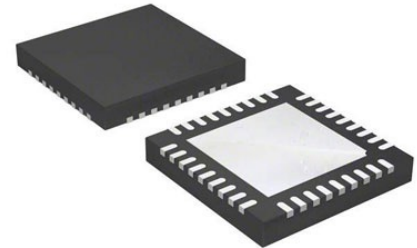

Images are for reference only

Please submit RFQ for USB2532I-1080AEN or [Email to us: sales@ovaga.com](mailto:sales@ovaga.com) We will contact you in 12 hours.

[RFQ](#)

General Description

The Microchip USB2532 is a low-power, OEM configurable, MTT (Multi-Transaction Translator) USB 2.0 hub controller with 2 downstream ports and advanced features for embedded USB applications. The USB2532 is fully compliant with the USB 2.0 Specification, USB 2.0 Link Power Management Addendum and will attach to an upstream port as a Full-Speed hub or as a Full-/Hi-Speed hub. The 2-port hub supports Low-Speed, Full-Speed, and Hi-Speed (if operating as a Hi-Speed hub) downstream devices on all of the enabled downstream ports. The USB2532 has been specifically optimized for embedded systems where high performance, and minimal BOM costs are critical design requirements. Standby mode power has been minimized and reference clock inputs can be aligned to the customer's specific application. Additionally, all required resistors on the USB ports are integrated into the hub, including all series termination and pull-up/pulldown resistors on the D+ and D- pins. The USB2532 supports both upstream battery charger detection and downstream battery charging. The USB2532 integrated battery charger detection circuitry supports the USB-IF Battery Charging (BC1.2) detection method and most Apple devices. These circuits are used to detect the attachment and type of a USB charger and provide an interrupt output to indicate charger information is available to be read from the device's status registers via the serial interface. The USB2532 provides the battery charging handshake and supports the following USB-IF BC1.2 charging profiles:

DCP: Dedicated Charging Port (Power brick with no data)

CDP: Charging Downstream Port (1.5A with data)

SDP: Standard Downstream Port (0.5A with data)

Custom profiles loaded via SMBus or OTP

The USB2532 provides an additional USB endpoint dedicated for use as a USB to I2C interface, allowing external circuits or devices to be monitored, controlled, or configured via the USB interface.*The USBCheck online design review service is subject to Microchip's Program Terms and Conditions and requires a myMicrochip account.

Features

Highlights

Hub Controller IC with 2 downstream ports

USB-IF Battery Charger revision 1.2 support on up and downstream ports (DCP, CDP, SDP)

Battery charging support for Apple® devices

FlexConnect: Downstream port 1 able to swap with upstream port, allowing master capable devices to control other devices on the hub

USB to I2C™ bridge endpoint support

USB Link Power Management (LPM) support

SUSPEND pin for remote wakeup indication to host

Vendor Specific Messaging (VSM) support

Enhanced OEM configuration options available through a single serial I2C EEPROM, OTP, or SMBus Slave Port

36-pin (6x6mm) SQFN, RoHS compliant package

Footprint compatible with USB2512B

Target Applications

LCD Monitors and TVs

Multi-function USB Peripherals

PC Motherboards

Set-top Boxes, DVD Players, DVR/PVR

Printers and Scanners

PC Media Drive Bay

Portable Hub Boxes

Mobile PC Docking


Embedded Systems

Related Products



[USB2512B-AEZG-TR](#)

Microchip Technology, Inc
VQFN-36



[USB5534B-5000JZX](#)

Microchip Technology, Inc
QFN-64



[USB3250-ABZI](#)

Microchip Technology, Inc
VQFN-56



[USB2513B-AEZC](#)

Microchip Technology, Inc
VQFN-36



[USB2504A-JT](#)

Microchip Technology, Inc
LQFP-64



[USB2514B-AEZG](#)

Microchip Technology, Inc
VQFN-36



[USB2512-AEZG](#)

Microchip Technology, Inc
VQFN-36



[USB2514-HZH](#)

Microchip Technology, Inc
VQFN-48