


16-bit I2C-bus and SMBus low power I/O port with interrupt and reset - # of Addresses: 4 ; I2C-bus: 400 kHz; Interrupt: 0-1 ; Max Sink Current per bit: 25 mA; Max Sink Current, per package: 200 mA; Number of bits: 16 ; Operating temperature: -40~85 C,I/O Expanders, Repeaters & Hubs I2C/SMBUS 16BIT GPIO

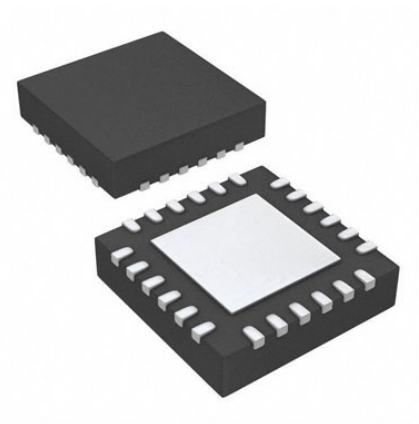

Images are for reference only

Manufacturers	<a href="#">NXP Semiconductor</a>
Package/Case	HVQFN-24
Product Type	Interface ICs
RoHS	Rohs
Lifecycle	

Please submit RFQ for PCA9539BS,118 or [Email to us: sales@ovaga.com](mailto:sales@ovaga.com) We will contact you in 12 hours.

[RFQ](#)

## General Description

### Features

16-bit I2C-bus and SMBus low power I/O port with interrupt and reset

### Related Products



[LPC2468FET208](#)

NXP Semiconductor  
TFBGA-208



[LPC2292FBD144](#)

NXP Semiconductor  
LQFP-144



[PCA9505DGG,118](#)

NXP Semiconductor  
TSSOP-56



[PCA82C250N](#)

NXP Semiconductor  
DIP-8



[LPC2214FBD144](#)

NXP Semiconductor  
LQFP-144



[LPC2210FBD144](#)

NXP Semiconductor  
TQFP144



[PCA82C250T/YM,112](#)

NXP Semiconductor

SO-8



[PCA82C250T](#)

NXP Semiconductor

SOP8