


Dual bidirectional I2C-bus and SMBus voltage-level translator - Application: Voltage Translation ; Function: Open Drain Voltage Translation ; Number of bits: 2 ; Operating temperature: -40~85 Cel; Voltage Translation Range: 1.0 to 5.0 ~ 1.0 to 5.0 V;; Translation - Voltage Levels DUAL I2C/SMBUS VOLT TRANSL

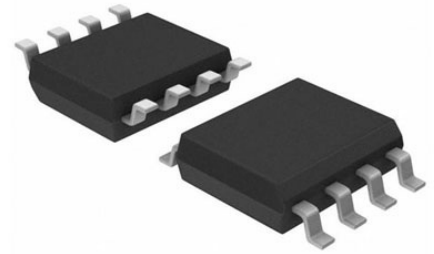

Manufacturers	NXP Semiconductor
Package/Case	SO-8
Product Type	Translation - Voltage Levels
RoHS	Rohs
Lifecycle	

Images are for reference only

Please submit RFQ for PCA9306D,118 or [Email to us: sales@ovaga.com](mailto:sales@ovaga.com) We will contact you in 12 hours.


[RFQ](#)

General Description

Features


Dual bidirectional I2C-bus and SMBus voltage-level translator

Related Products




[PCA9555BS](#)

NXP Semiconductor




[PCA9698BS](#)

NXP Semiconductor



[PCA9701PW](#)

NXP Semiconductor




[PCA9306GF,115](#)

NXP Semiconductor
XSON-8



[PCA9306DC1,125](#)

NXP Semiconductor
VSSOP-8




[PCA9515ADP](#)

NXP Semiconductor



[PCA9517AD](#)

NXP Semiconductor



[PCA9547PW](#)

NXP Semiconductor