


LDO Regulator Pos 0.8V0.9V1V1.1V1.2V1.5V1.8V 5A Automotive 28-Pin QFN EP Tube

Manufacturers	<a href="#">Analog Devices, Inc</a>
Package/Case	QFN28
Product Type	Power Management ICs
RoHS	Pb-free Halide free
Lifecycle	

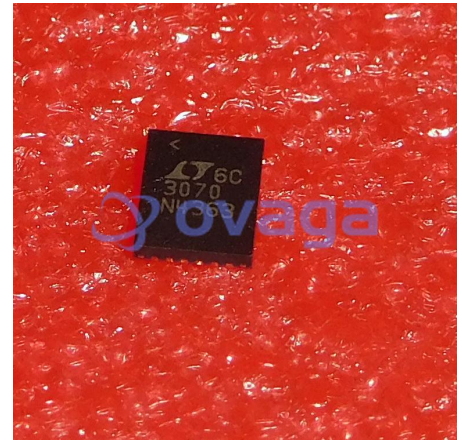

Images are for reference only

Please submit RFQ for LT3070IUFD#PBF or [Email to us: sales@ovaga.com](mailto:sales@ovaga.com) We will contact you in 12 hours.

[RFQ](#)

## General Description

The LT3070 is a low voltage, UltraFast™ transient response linear regulator. The device supplies up to 5A of output current with a typical dropout voltage of 85mV. A 0.01µF reference bypass capacitor decreases output voltage noise to 25µVRMS. The LT3070's high bandwidth permits the use of low ESR ceramic capacitors, saving bulk capacitance and cost. The LT3070's features make it ideal for high performance FPGAs, microprocessors or sensitive communication supply applications.

Output voltage is digitally selectable in 50mV increments over a 0.8V to 1.8V range. A margining function allows the user to adjust system output voltage in increments of ±1%, ±3% or ±5%. The IC incorporates a unique tracking function to control a buck regulator powering the LT3070's input. This tracking function drives the buck regulator to maintain the LT3070's input voltage to VOUT + 300mV, minimizing power dissipation.

Internal protection includes UVLO, reverse-current protection, precision current limiting with power foldback and thermal shutdown. The LT3070 regulator is available in a thermally enhanced 28-lead, 4mm × 5mm QFN package.

## Features

Output Current: 5A

Dropout Voltage: 85mV Typical

Digitally Programmable VOUT : 0.8V to 1.8V

Digital Output Margining:  $\pm 1\%$ ,  $\pm 3\%$  or  $\pm 5\%$

Low Output Noise: 25 $\mu$ VRMS (10Hz to 100kHz)

Parallel Multiple Devices for 10A or More

Precision Current Limit:  $\pm 20\%$

Stable with Low ESR Ceramic Output Capacitors (15 $\mu$ F Minimum)

High Frequency PSRR: 30dB at 1MHz

Enable Function Turns Output On/Off

VIOC Pin Controls Buck Converter to Maintain Low Power Dissipation and Optimize Efficiency

PWRGD/UVLO/Thermal Shutdown Flag

Current Limit with Foldback Protection

Thermal Shutdown

28-Lead (4mm  $\times$  5mm  $\times$  0.75mm) QFN Package


## Application

FPGA and DSP Supplies

ASIC and Microprocessor Supplies

Servers and Storage Devices

Post Buck Regulation and Supply Isolation

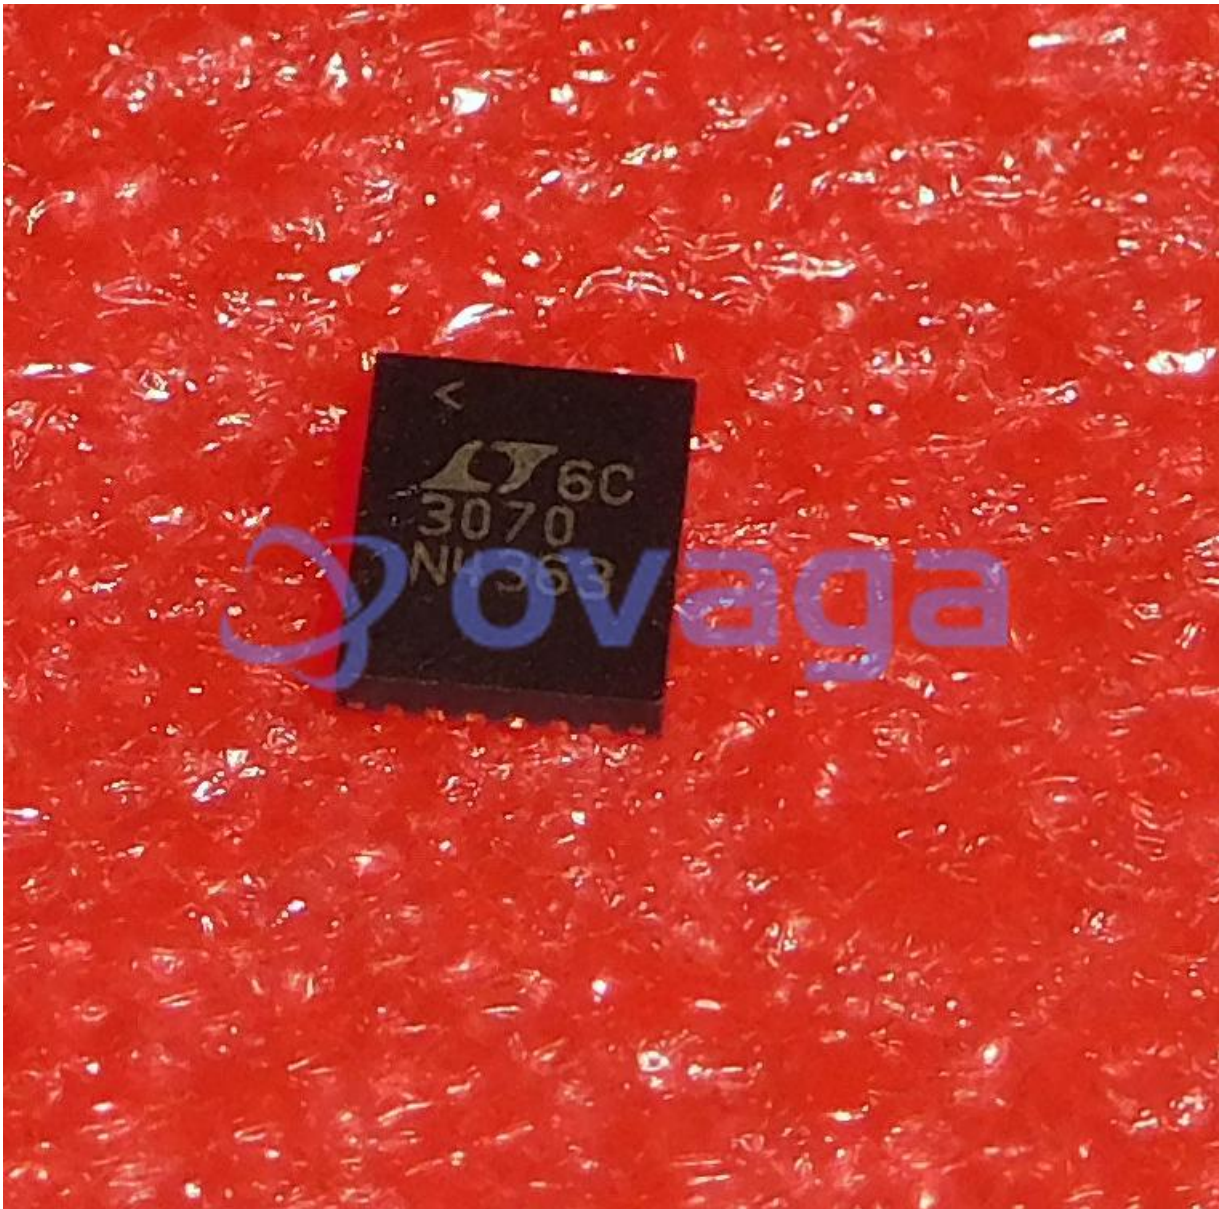

## Related Products



### [LT3763EFE](#)

Analog Devices, Inc  
TSSOP28



### [LTC4417IUF](#)

Analog Devices, Inc  
QFN-24



### [LTC1966CMS8#PBF](#)

Analog Devices, Inc  
MSOP-8P



### [LT1038CK](#)

Analog Devices, Inc  
TO-3



### [LTC3440EMS](#)

Analog Devices, Inc  
MSOP10



### [LTC2990IMS#PBF](#)

Analog Devices, Inc  
10MSOP



[LTM8045EY#PBF](#)

Analog Devices, Inc  
BGA40



[LT4295IUFD#PBF](#)

Analog Devices, Inc  
28-WFQFN