


Dual 4-Line To 1-Line Data Selectors/Multiplexers 16-TSSOP -40 to 85, Encoders, Decoders, Multiplexers & Demultiplexers 4-16 DECODER/DEMUX

Manufacturers	<u>NXP Semiconductor</u>
Package/Case	SOT-137
Product Type	Logic ICs
RoHS	Rohs
Lifecycle	

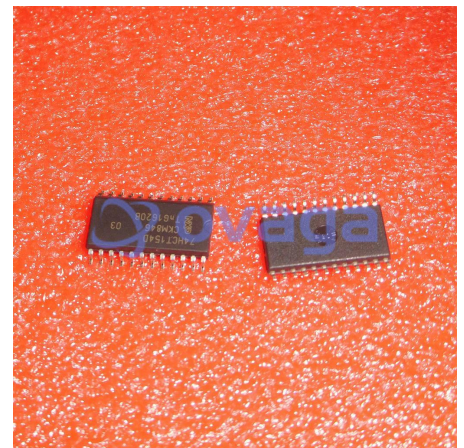

Images are for reference only

Please submit RFQ for 74HCT154D or [Email to us: sales@ovaga.com](mailto:sales@ovaga.com) We will contact you in 12 hours.

[RFQ](#)

General Description

74HCT154D is a 4-to-16 line decoder/demultiplexer IC (integrated circuit) with a high-speed CMOS logic technology. It is designed to convert a 4-bit binary code to a 16-line output, and it can also be used as a demultiplexer by using the enable input.

Features


Supply voltage range: 4.5V to 5.5V

Low power consumption

High noise immunity

Output capability: High fan-out, TTL compatible

Schmitt-trigger input

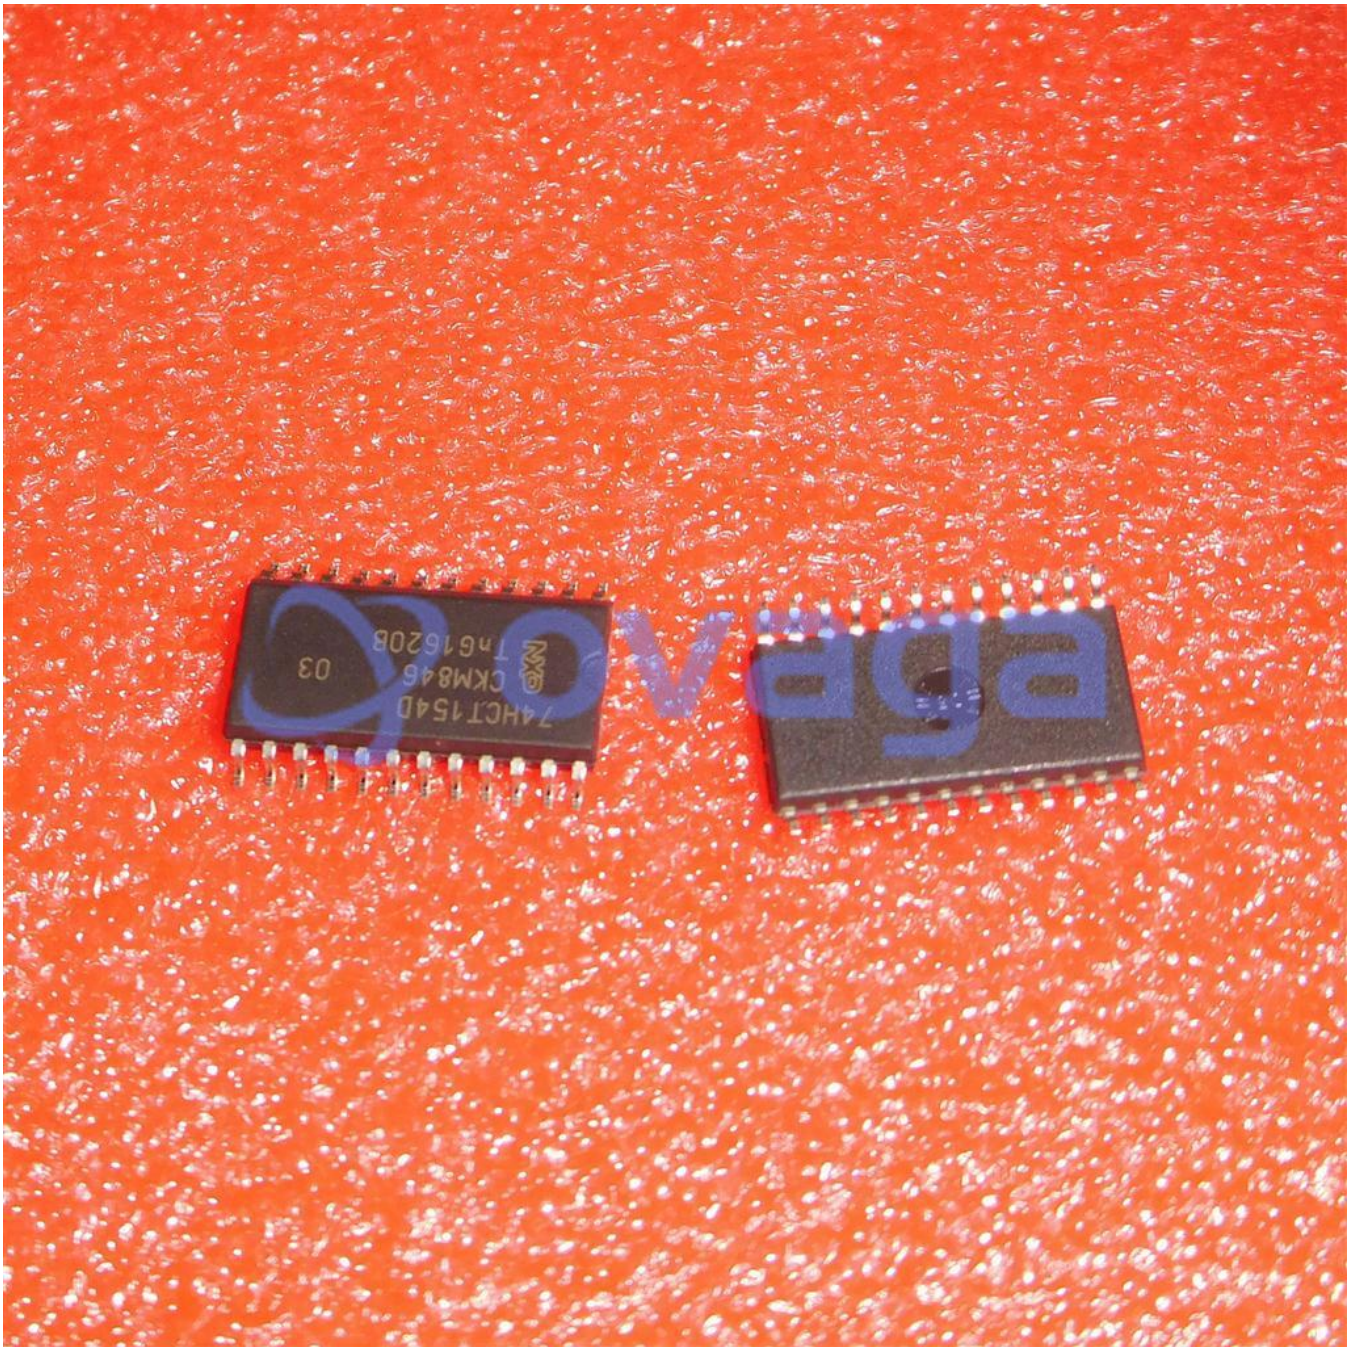

Related Products



[74HC4050D](#)

NXP Semiconductor
16-SOIC



[74HC574D](#)

NXP Semiconductor
20-SOIC



[74HC132D](#)

NXP Semiconductor
SOP-14



[74HC165D](#)

NXP Semiconductor
SOP-16



[74HC259D](#)

NXP Semiconductor
SOP-16



[74HCT02D](#)

NXP Semiconductor
SOP-14



[74HC14D](#)

NXP Semiconductor
SOP-14



[74HC04D](#)

NXP Semiconductor
SOP-14