


4Mb Advanced LPSRAM (256-kword × 16-bit)

Manufacturers	<a href="#">Renesas Technology Corp</a>
Package/Case	
Product Type	Memory
RoHS	
Lifecycle	

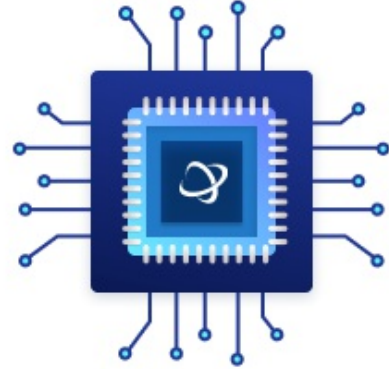

Images are for reference only

Please submit RFQ for RMLV0416EGSB-4S2#AA0 or [Email to us: sales@ovaga.com](mailto:sales@ovaga.com) We will contact you in 12 hours.

[RFQ](#)

## General Description

### Features

Single 3V supply: 2.7V to 3.6V

Access time: 45ns (max.)

Current consumption: Standby: 0.3μA (typ.)

Equal access and cycle times

Common data input and output Three state output

Directly TTL compatible All inputs and outputs


Battery backup operation

### Related Products



#### [RMLV0416EGSB-4S2#AA1](#)

Renesas Technology Corp  
44- TSOP (0.400, 10.16mm Width)




#### [RMLV1616AGSD-5S2#AA1](#)

Renesas Technology Corp



[RMLV1616AGSA-5S2#AA0](#)

Renesas Technology Corp  
TSOP-5




[RMLV1616AGBG-5S2#AC0](#)

Renesas Technology Corp  
48-TFBGA



[RMLV0816BGSB-4S2#AA0](#)

Renesas Technology Corp  
TSOP(44)



[RMLV0416EGSB-4S2#HA1](#)

Renesas Technology Corp



[RMLV0408EGSP-4S2#CA0](#)

Renesas Technology Corp  
32-SOIC (0.450, 11.40mm Width)



[RMLV0408EGSB-4S2#AA1](#)

Renesas Technology Corp  
TSOP-32