


8 Bit MCU, Flash, PIC16 Family PIC16F18XX Series Microcontrollers, 32 MHz, 14 KB, 1 KB, 16 Pins

Manufacturers	Microchip Technology, Inc
Package/Case	QFN-16
Product Type	Embedded Processors & Controllers
RoHS	Rohs
Lifecycle	

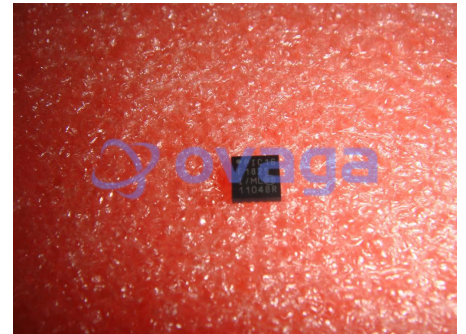

Images are for reference only

Please submit RFQ for PIC16F1825-I/ML or [Email to us: sales@ovaga.com](mailto:sales@ovaga.com) We will contact you in 12 hours.

[RFQ](#)

General Description

OVERVIEW

The PIC16F/LF182X and PIC12F/LF1822 devices can be programmed using either the high-voltage In-Circuit Serial Programming™ (ICSP™) method or the low voltage ICSP™ method.

Features

Enhanced Mid-range Core with 49 Instruction, 16 Stack Levels

Flash Program Memory with self read/write capability

Internal 32MHz oscillator

Integrated Capacitive mTouch Sensing Module

Data Signal Modulator for generation of custom bit streams

CVREF can be used as 5-bit DAC

MI2C, SPI, EUSART w/auto baud

2 ECCP & 2 CCP (Enhanced/Capture Compare PWM)

Comparators with selectable Voltage Reference

8 Channel 10b ADC with Voltage Reference

25mA Source/Sink current I/O

Four 8-bit Timers (TMR0/TMR2/TMR4/TMR6)

One 16-bit Timer (TMR1)

Extended Watchdog Timer (EWDT)

Enhanced Power-On/Off-Reset

Brown-Out Reset (BOR)


In Circuit Serial Programming (ICSP)

On Board In-Circuit Debug

Wide Operating Voltage (1.8V – 5.5V)


Low Power PIC16LF182x variants (1.8V – 3.6V)

Standby Current (PIC16LF182X): 30 nA @ 1.8V, typical

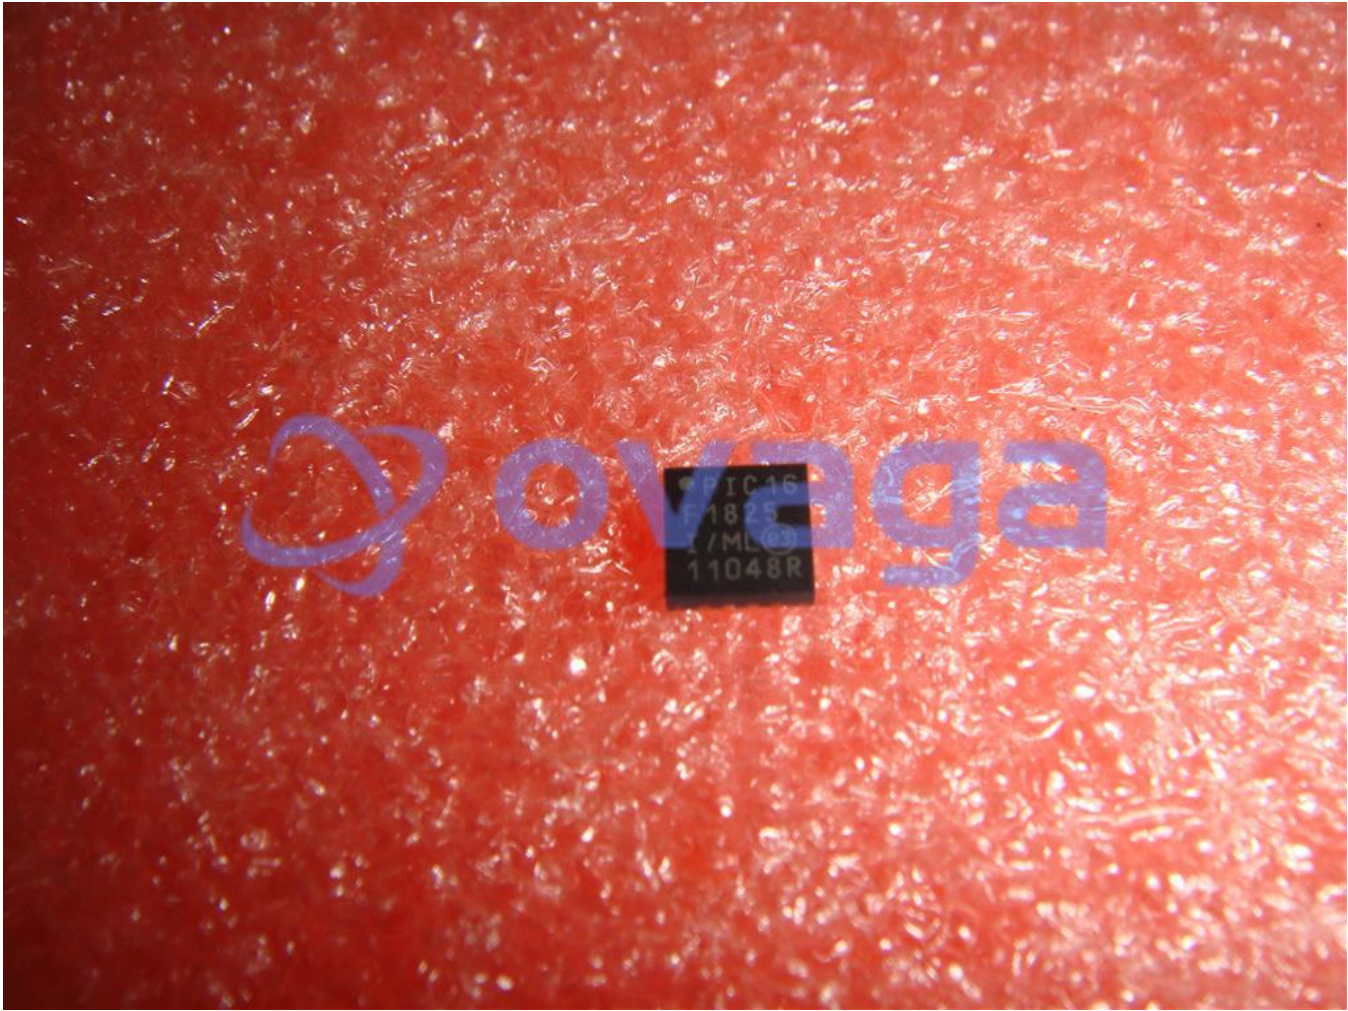



Related Products




[PIC24F16KA101-I/SS](#)

Microchip Technology, Inc
SSOP-20



[PIC16F1938-I/SP](#)

Microchip Technology, Inc
PDIP-28



[PIC18F6520-I/PT](#)

Microchip Technology, Inc
TQFP-64



[PIC16F1936-I/SS](#)

Microchip Technology, Inc
SSOP-28



[PIC18F23K22-I/SP](#)

Microchip Technology, Inc
SPDIP-28



[PIC18F2620-I/SP](#)

Microchip Technology, Inc
SPDIP-28



[PIC18F2620-I/SO](#)

Microchip Technology, Inc
SOIC-28



[PIC18F97J60T-I/PT](#)

Microchip Technology, Inc
TQFP-100